

ALTAIR[®] 4XR Multigas Detector



Real-time. Rugged. Reliable.

*Because every life has a **purpose...***

SAFETY AT THE *SPEED OF NOW*




BE SAFER

With rapid-response sensors.

- LEL
- CO
- O₂
- SO₂
- H₂S
- NO₂

POWERED BY
XCell
SENSORS

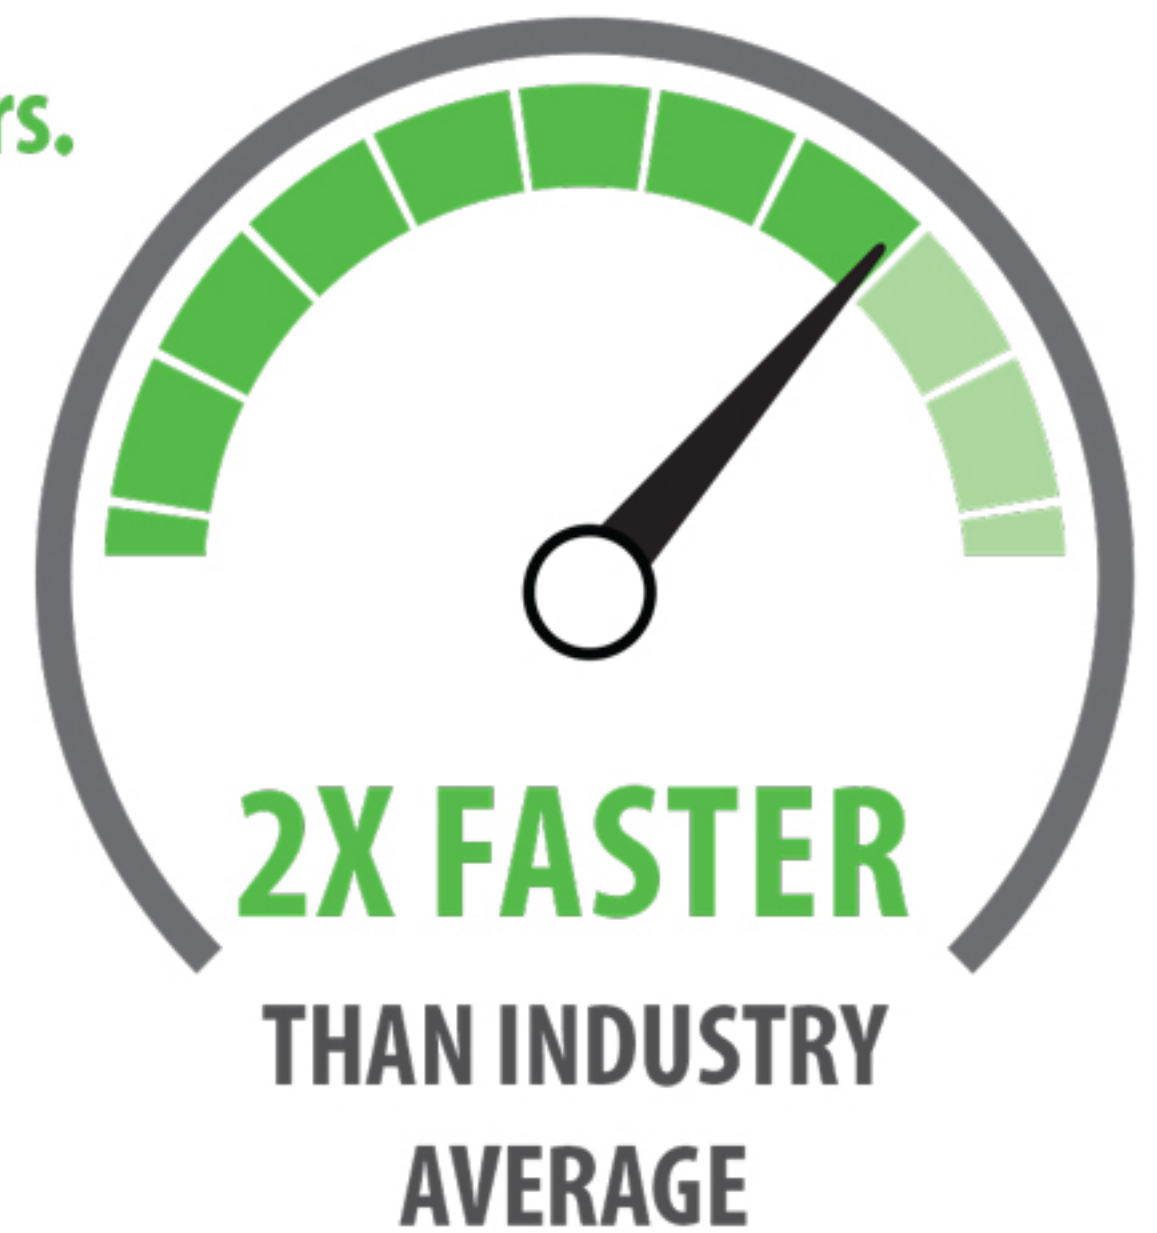

WORK SMARTER

With the ALTAIR Connect app.

- Update detector settings
- Email calibration details
- Create notification groups
- Get compliance reminders



ALTAIR® Connect






STAY CONNECTED

With alerts from the field.


- Live gas readings
- InstantAlert™ distress calls
- MotionAlert™ man-down alarms
- Non-compliance warnings



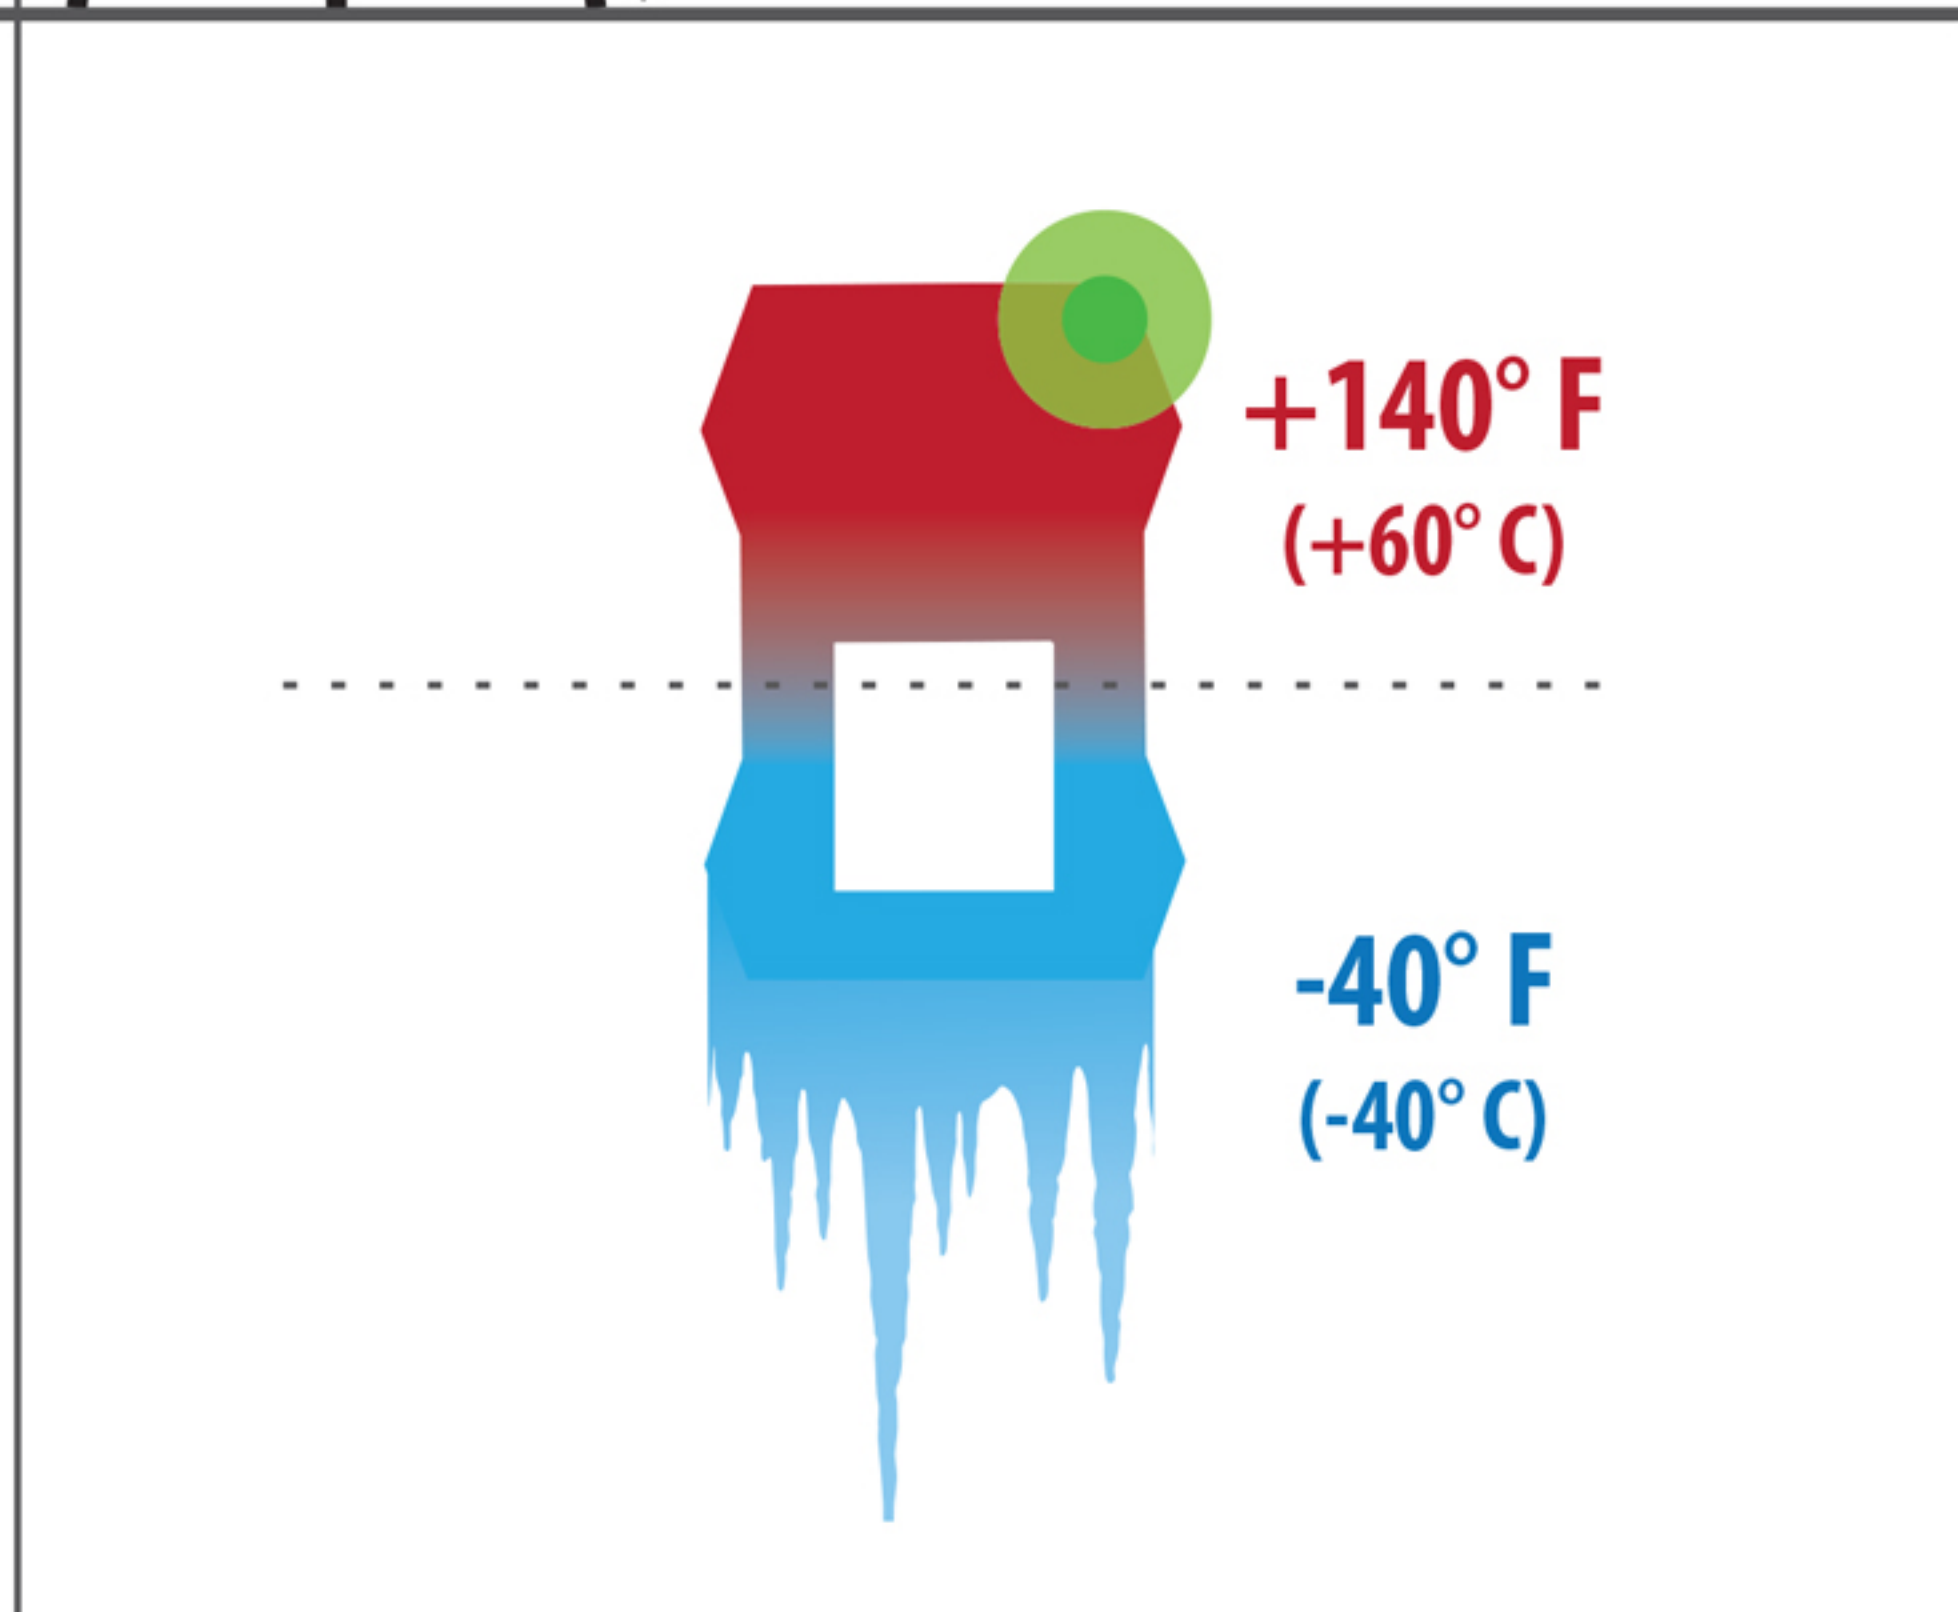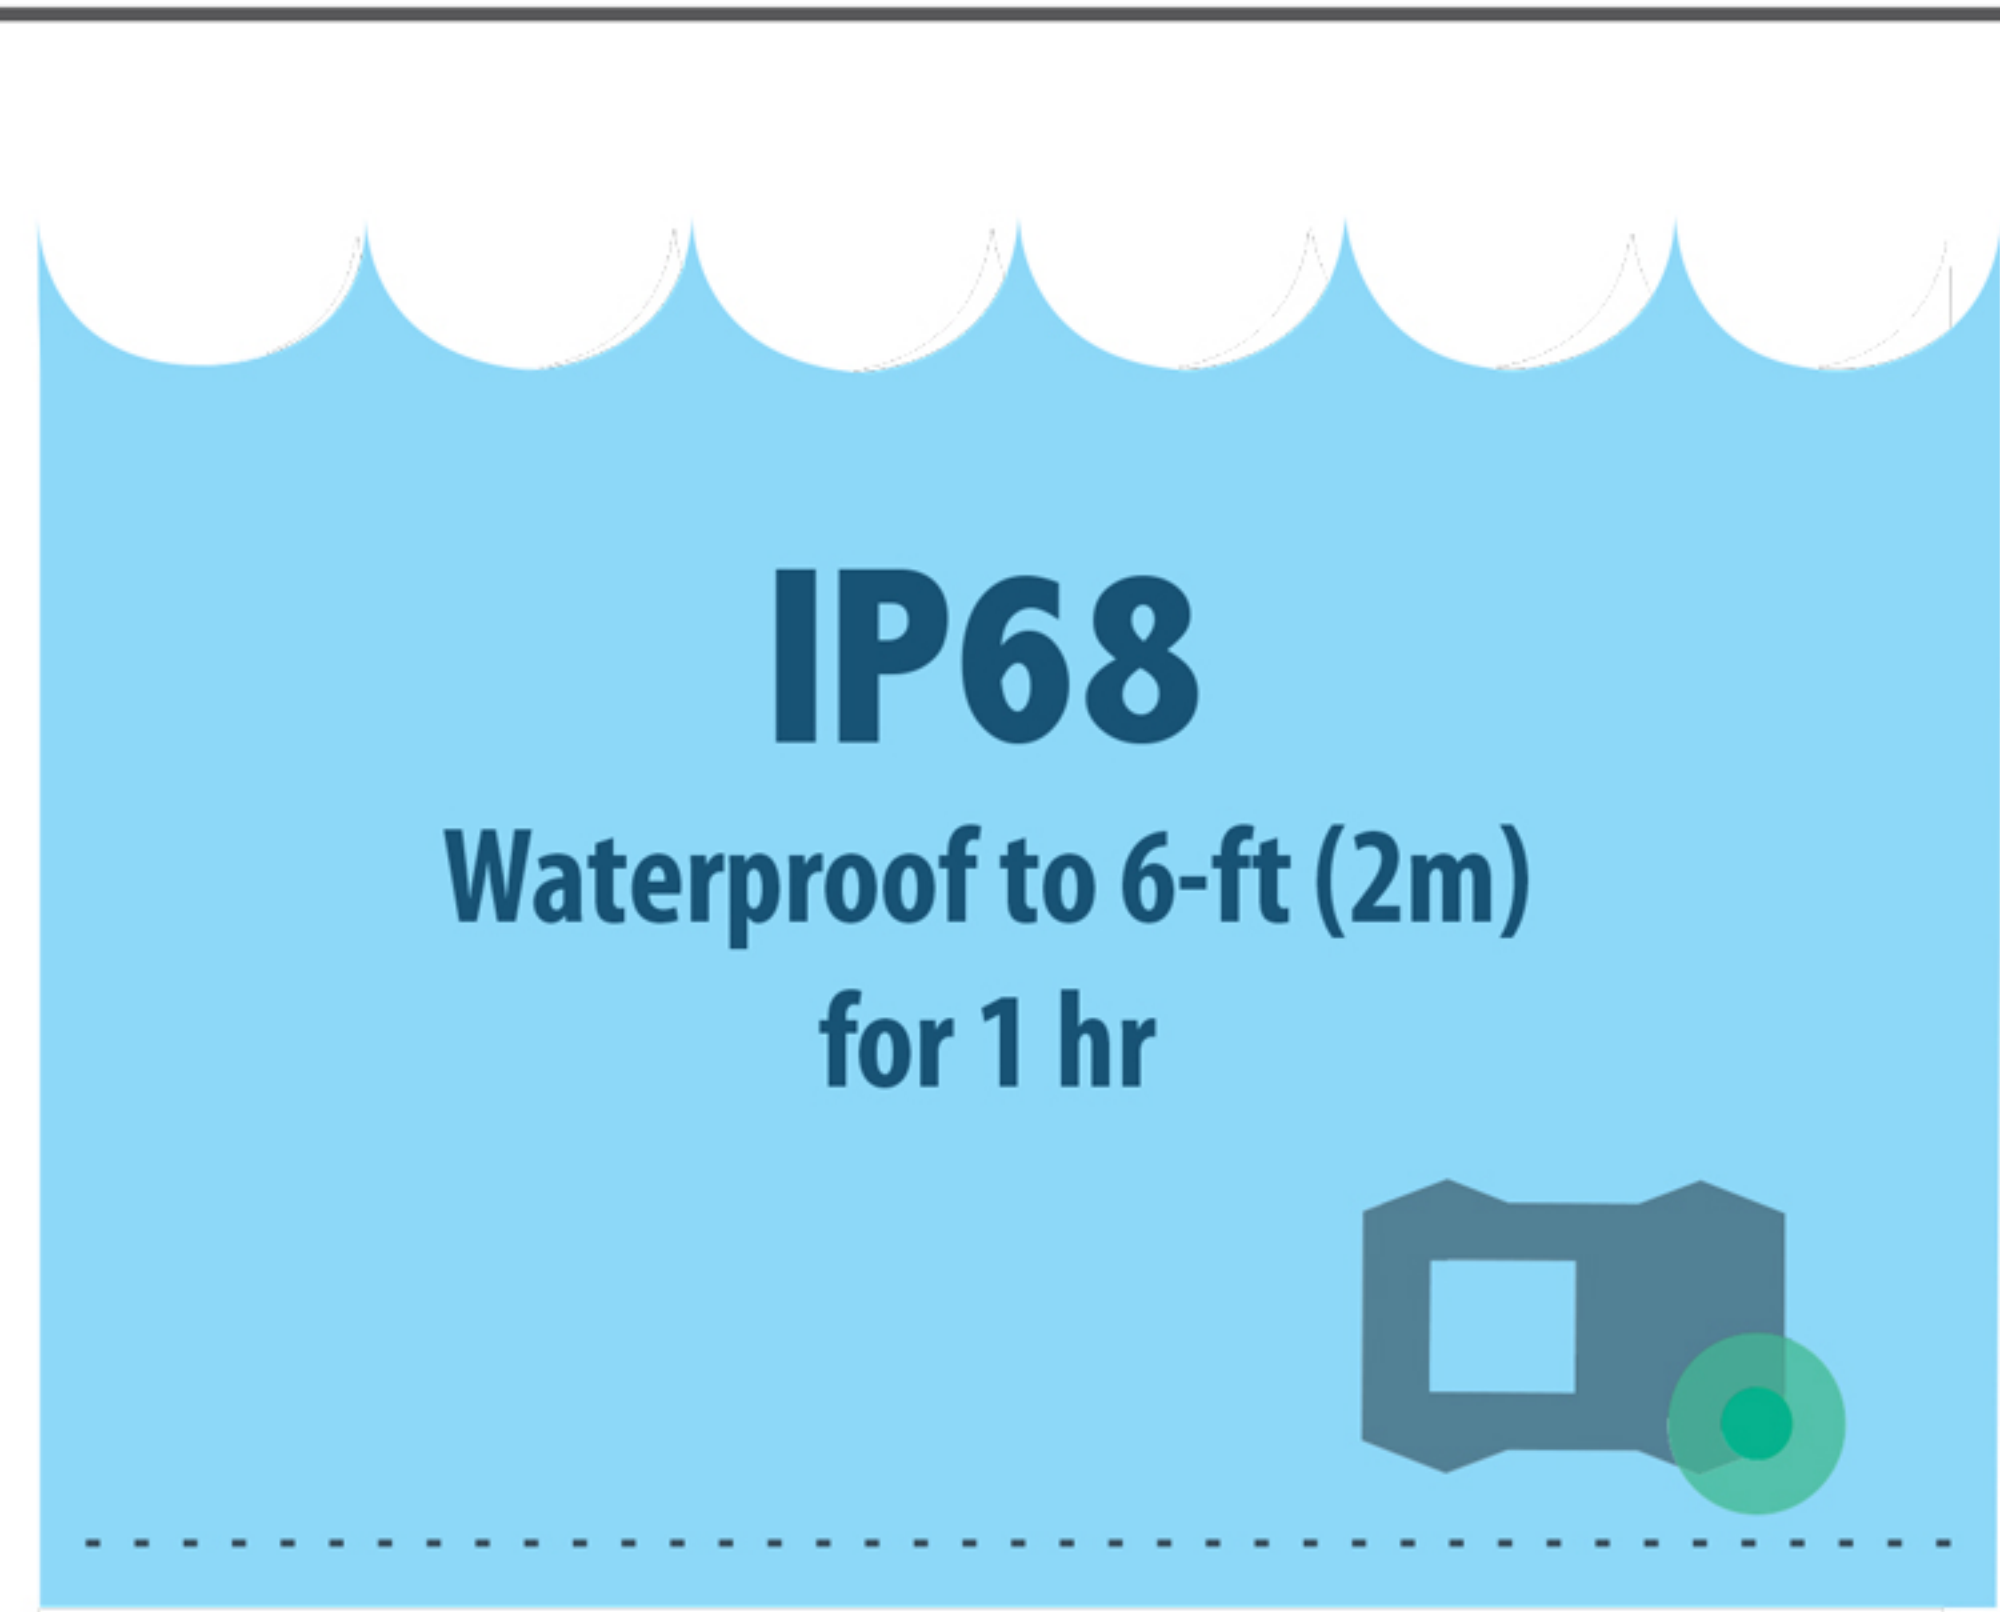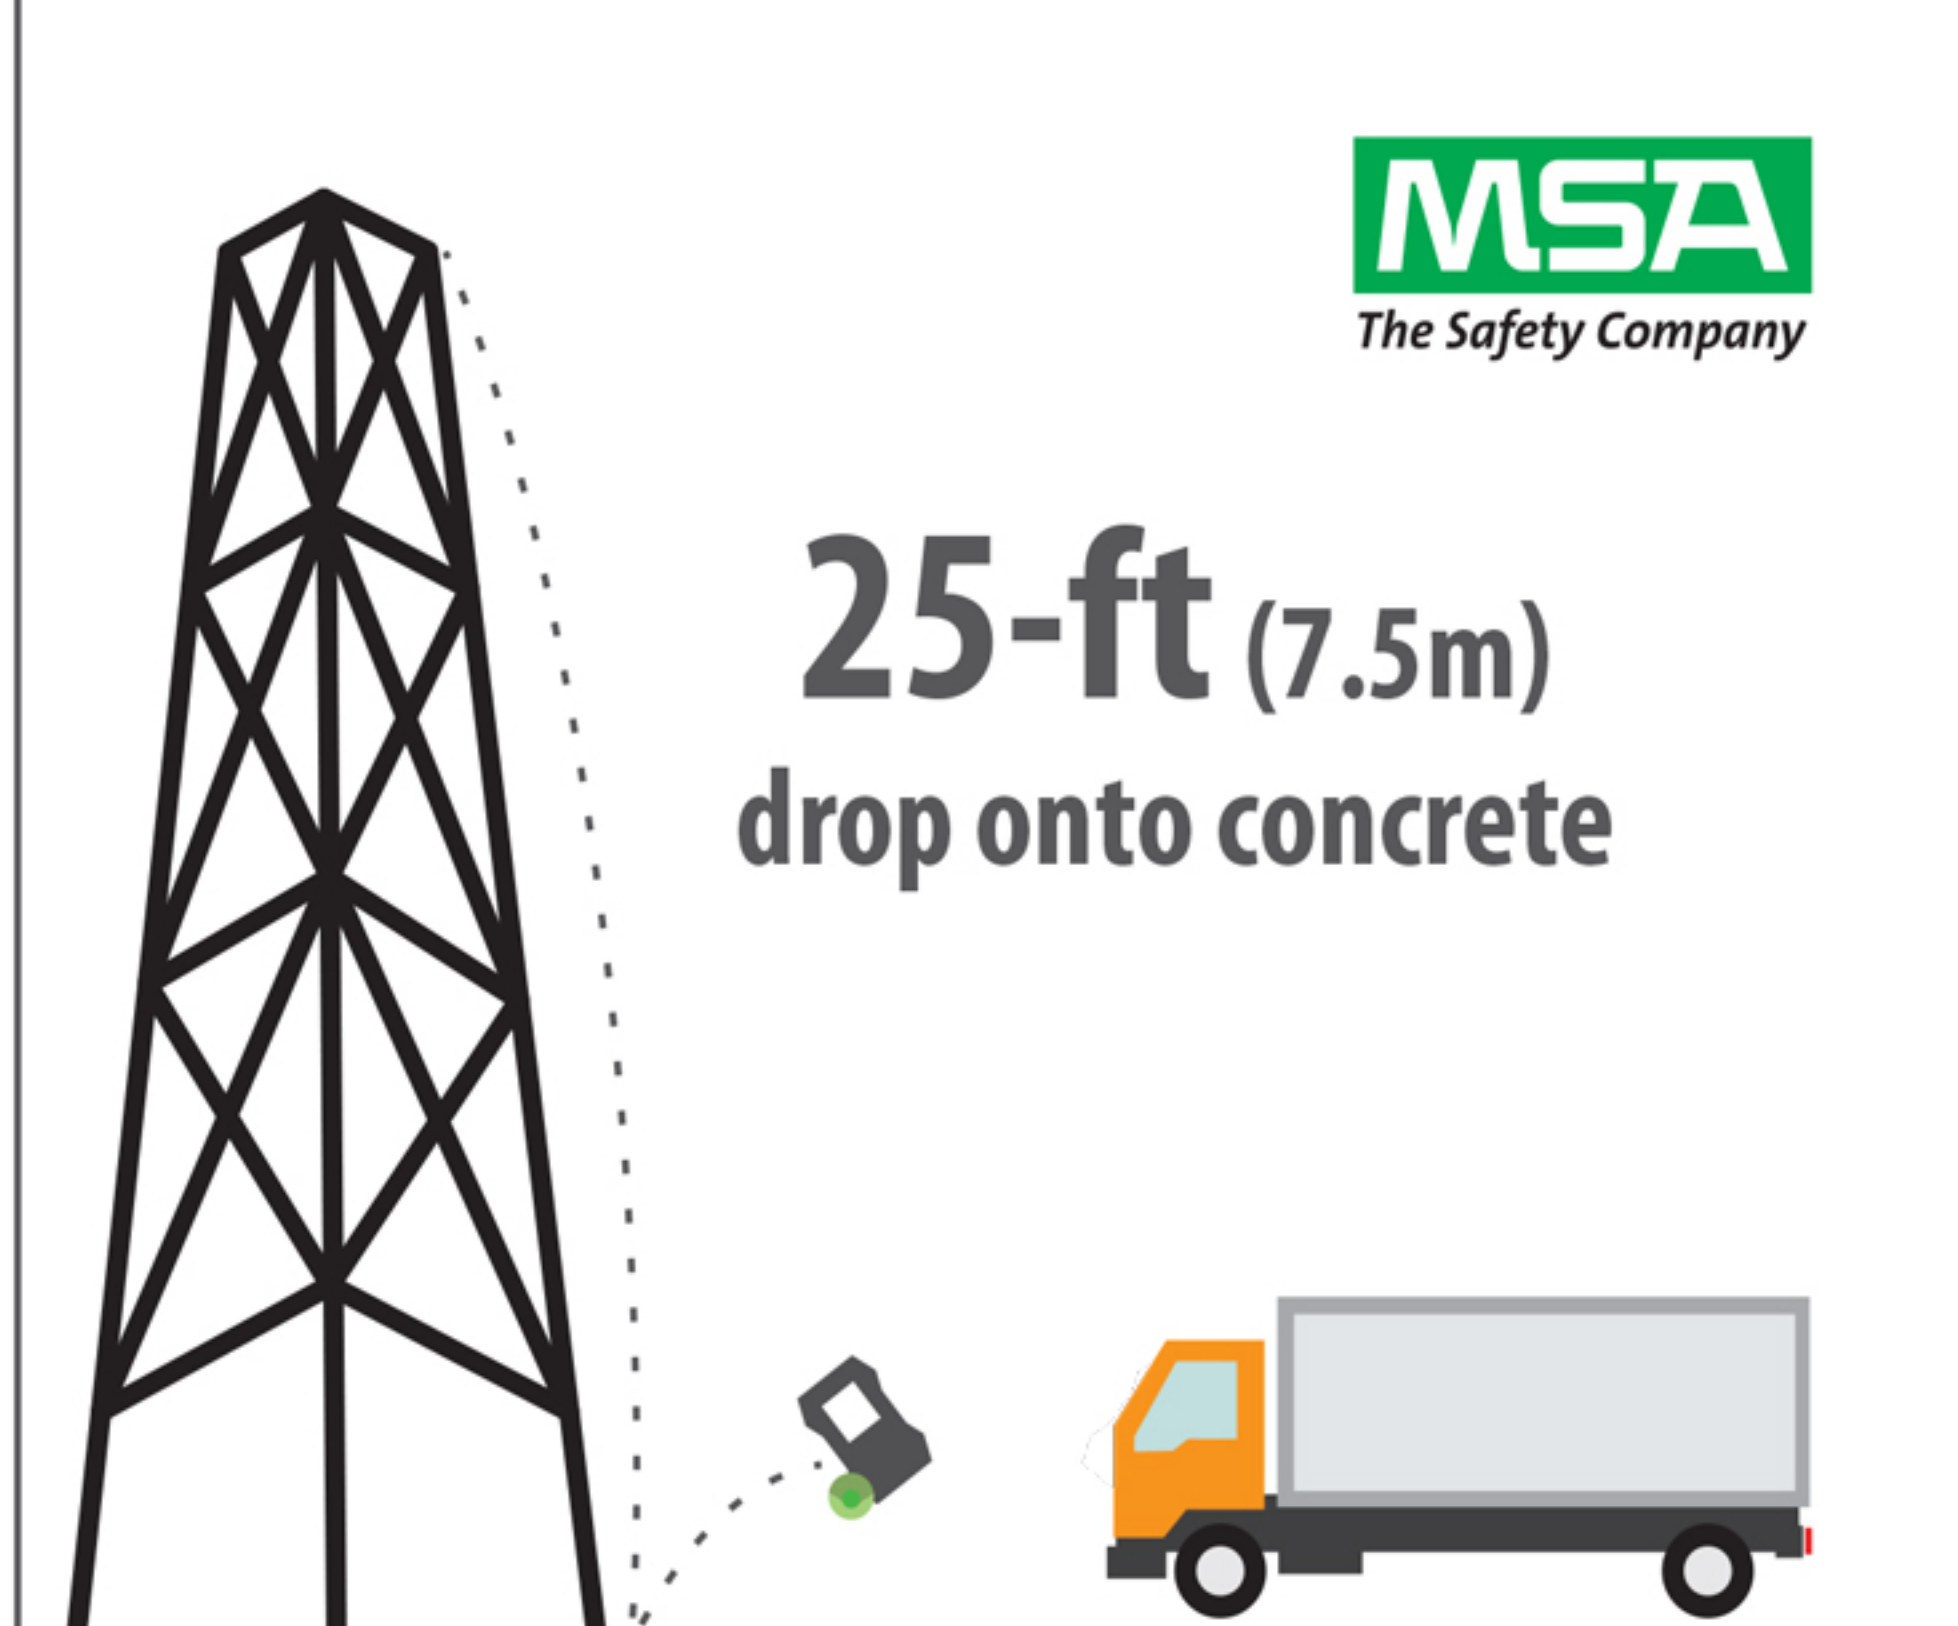


BUILT TO WORK WHEREVER YOU WORK

FAST, EFFICIENT MAINTENANCE

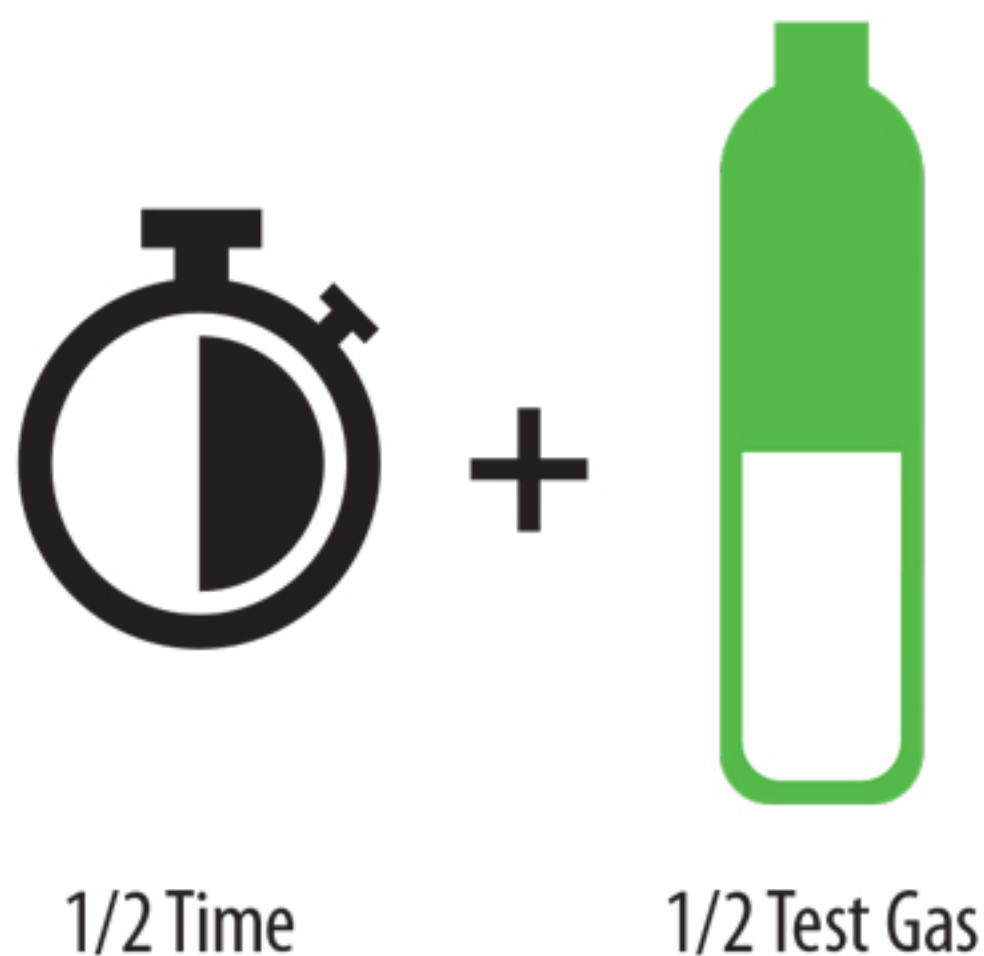

COMPLIANCE AT A GLANCE

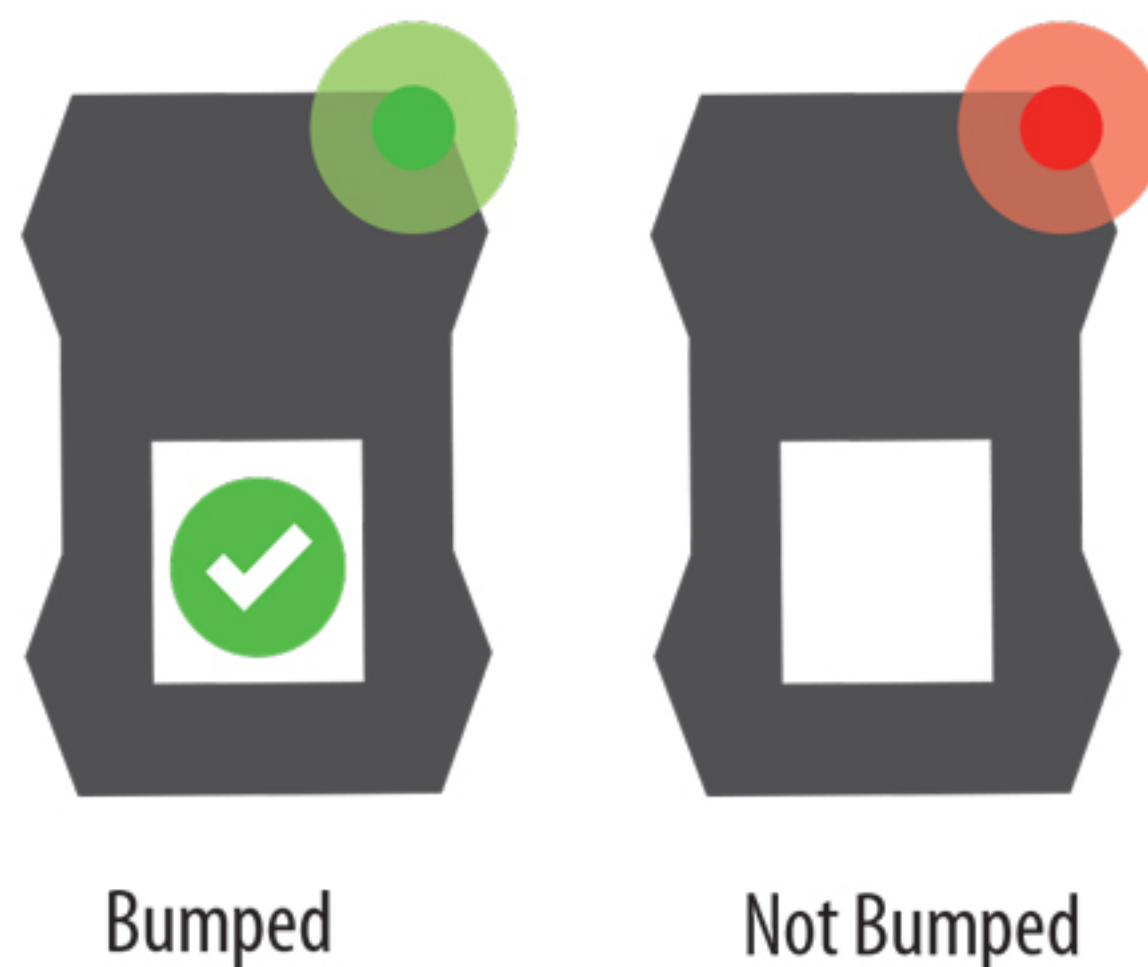

GUARANTEED PERFORMANCE



Specifications & Order Information

Specification	Description		
GAS TYPES	Gas	Range	Resolution
	LEL	0-100%	1%
	O ₂	0-30%	0.1%
	CO	0-1999 ppm	1 ppm
	H ₂ S	0-200 pm	1 ppm
	H ₂ S-LC	0-100 ppm	0.1 ppm
	SO ₂	0-20 ppm	0.1 ppm
	NO ₂	0-50 ppm	0.1 ppm
WARRANTY	4 years (+ optional 1-year extension)		
DURABILITY	25-foot (7.5 m) drop protection MIL-STD-810G drop protection Certified IP68 rating		
TEMPERATURE RANGE	-40°F to +140°F -40°C to +60°C		
RELATIVE HUMIDITY	5% - 95% intermittent 15% - 90% non-condensing		
POWER	Rechargeable Li-polymer battery 24-hour run-time < 4 hour charge time		
PHYSICAL	4.4" x 3.0" x 1.4" 11 cm x 7.6 cm x 3.5 cm 8 oz (228 g)		
DATALOGGING	> 50 hours (adjustable) > 500 event logs		

ALTAIR 4XR Gas Detector Part Numbers			
Configuration	Case Color	USA/CAN	ATEX
LEL, O ₂ , CO, H ₂ S	Charcoal	10178557	10178573
LEL, O ₂ , CO, H ₂ S	Phosphorescent	10178558	10178569
Need something different? Contact MSA for options.			

Kits with ALTAIR 4XR (LEL, O ₂ , CO, H ₂ S & Charcoal Case)	USA/CAN
34-liter gas cylinder (1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S) Regulator (0.25 l/min)	10178356
ALTAIR Pump Probe 34-liter gas cylinder (1.45% CH ₄ , 15% O ₂ , 60 ppm CO, 20 ppm H ₂ S) Regulator (0.25 l/min)	10178357

MSA GALAXY® GX2 Automated 4XR Test Stands for 1 Gas Cylinder				
Integrated 4XR Charger	N. America	Europe	UK	Australia
Yes	10128630	10128639	10128659	10128669
No	10128642	10128651	10128661	10128671
Need to accommodate multiple cylinders? Contact MSA for options.				

Calibration Gas		XCell Sensor Replacement Kits	
1.45% CH₄, 15% O₂, 60 ppm CO, 20 ppm H₂S		EX Combustible	10106722
34-liter cylinder	10048280	O ₂	10106729
58-liter cylinder	10045035	CO/H ₂ S	10106725
		CO/H ₂ S-LC	10121213
		CO-H ₂ /H ₂ S	10121214
		SO ₂ /H ₂ S-LC	10121215
		CO/NO ₂	10121217
ALTAIR Pump Probe with charger			
For USA/Canada	10152669		
For ATEX/IEC	10052668		
Don't need a charger? Contact MSA for options.			

Certifications		
North America USA Class I, Division 1, Groups A, B, C & D Class II, Division 1, Groups E, F & G Class III, Division 1 Ambient temperature: -40°C to +60°C; T4 Canada CSA CAN/CSA C22.2 No. 152 Combustible Gas Detection Instruments C22.2 No. 152 Performance Ambient Temperature: -20°C to +54°C; T4 C22.2 No. 157 Intrinsic Safety Ambient Temperature: -40°C to +54°C; T4	Europe Directive 2014/34/EU (ATEX): II 1G Ex ia da IIC T4 Ga, -40°C to +60°C, IP68 CE 0080 Directive 2014/30/EU (EMC): EN50270 Type 2, EN61000-6-3	IEC IECEx Ex ia da IIC T4 Ga, -40°C to +60°C, IP68

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.

